

Compensateur de Dilatation


**Réf :
290 161**

INOX

- » MÉTALLIQUE
- » SANS TIRANTS

- » BRIDES ACIER
- » ISO PN16

- » TMS : 300°C (1)
- » PMS : 16B

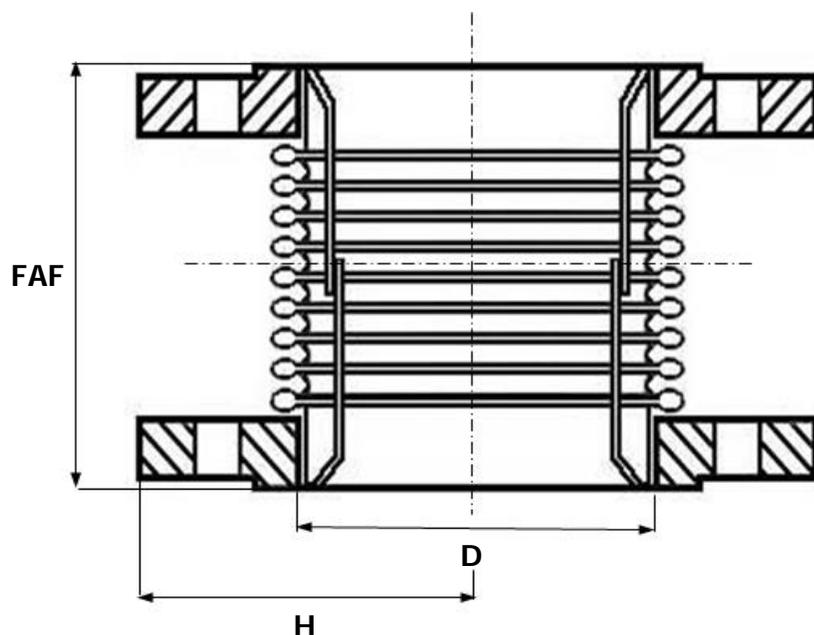

CORPS / BODY	INOX 304
CHEMISE INTERNE / INNER SLEEVE	INOX 304
BRIDES / FLANGES	ACIER E24

DN	8	10	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	
INCHES	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	
FAF					100	105	120	140	150	155	190	220	270	275	285							
FAF Minimum					89	95,0	107	120	130	130	158	187	230	242	245							
FAF Maximum					111	115	133	160	170	180	222	253	310	308	325							
H					57,5	70	75	82,5	92,5	100	110	125	142,5	170	197,5							
D					33	41	48	60	76	89	114	140	168	219	273							
MASSE					2,6	3,7	4,3	6,1	7,4	9,1	10,8	14,2	21,8	29,1	41,4							

Unités : mm, Kg.